

envirovent®

EBB *Design* RANGE

Centrifugal WC, Bathroom & Kitchen Fan



EBB Design RANGE

Centrifugal WC, Bathroom & Kitchen Fan



About

The EBB Design extractor fan is suitable for WC, bathroom & kitchen applications where higher system resistance pressures are encountered.

The fan has a forward curved centrifugal impeller with single phase motor 230V-50Hz and Class II insulation. Maximum operating temperature 40°C.

- Powerful forward curved centrifugal impellers
- Automatic backdraught shutter as standard
- IP44 rated
- 2 year warranty
- High performance
- Significant energy savings
- Quiet operation



Features

Adjustable Run-On Timer



Adjustable Run-On Timer from 1-30 minutes.

Dual Speed



The EBB 175 Design comes in both 1 and 2 speed versions.

Pullcord



Supplied with pullcord override.



The EBB Design has a forward curved centrifugal impeller that makes it ideal for installations with longer duct runs and increased system pressure.

ORDER CODE	EBBDES-175S	EBBDES-175T
Automatic Backdraught Shutter	•	•
Single Speed	•	•
Two Speed		
ON / OFF Pullcord		
Adjustable Run-On Timer		•
Humidity Sensor		

Backdraught Shutter

The EBB Design fans are fitted with an automatic back draft shutter to prevent air entry and limit heat leakage when the extractor is not operating.




Forward Curved Centrifugal Impeller

To deliver high performance with a minimum noise level against high static pressure system resistance.



Installation Options

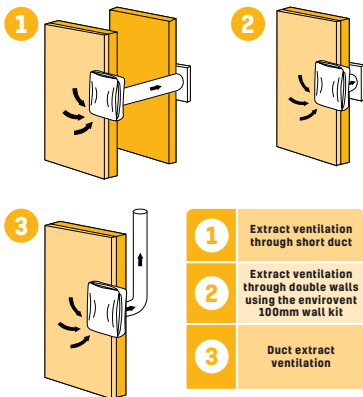

Technical Specification

Product

The EBB Design are centrifugal extract fans ideally suited for WC, bathroom & kitchen ventilation where higher system resistances are encountered. The fans are fitted with an automatic backdraught shutter as standard.

Applications

The EBB Design can be wall or ceiling mounted.

Performance

MODEL	EBB 175 DESIGN	
	LS	HS
SPEED (RPM)	930	1250
WATTS (W)	17	26
VOLTAGE (V) 50Hz	230	230
AIRFLOW l/s (m³/h)	22 (80)	43 (155)
dB(A) @ 1.5m	33	41
WEIGHT (Kg)	2.2	
IP RATING	IP44	
Ø DUCT (mm)	98	

Installation

Full installation guide is enclosed with all products; or sent separately in advance - if required.

Motor

Single phase motor 230V-50Hz.

Fan

The impeller is a powerful forward curved centrifugal fan to deliver high performance against high static pressure resistance.

Servicing / Maintenance

For cleaning purposes, the outer cover should be removed. The filter and the grille may be cleaned by hand in hot soapy water and the extractor housing wiped with a damp cloth.

Warranty


The EBB Design range is covered by a parts only 2-year warranty. Please note that conditions and exclusions apply to the warranty which can be found at www.envirovent.com/warranty.

Compliance


CE Marked.



Performance Curve EBB 175 DESIGN

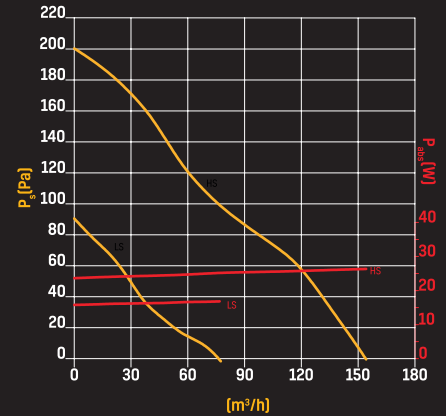

Dimensions (mm) EBB 175 DESIGN

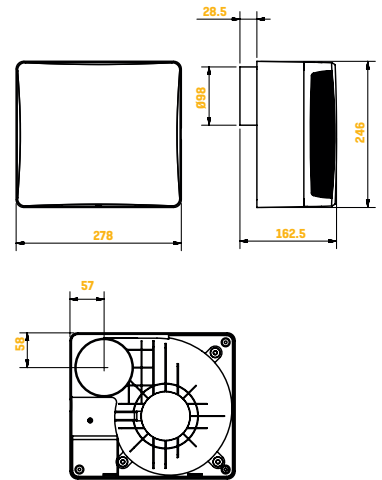

Options & Ancillaries

DESCRIPTION	CODE(S)
STANDARD WALL KIT	1RDEFWAK100
HIGH RISE INSTALLATION KIT	1RDEFPTK
ROUND DUCTING CHANNEL	1RD100X2M
CONDENSATION TRAP	1RDCONTRAP100
FIXED LOUVRE GRILL	1RDGRILL100
FLAT CHANNEL DUCTING	1FD204X602M

envirovent®

because your air matters

envirovent Ltd
 Harrogate West Business Park
 Unit 1 Bardner Bank
 Killinghall, Harrogate
 HG3 2SP

T / 01423 810 810
 E / enquiries@envirovent.com
 W / www.envirovent.com

Due to our policy of continuous innovation and improvement, envirovent reserves the right to alter products specification and appearance without notice.

E&OE | MKT ENV477 - V6 - 19/05/2026

Copyright © envirovent Ltd 2026



Follow us on
facebook



Find us on
LinkedIn



Watch us on
Youtube



Follow us on
Instagram

